

# MODULE 1: END USER CONFIGURATION

CONFIDENTIAL





Configure model

Objectives

Models and templates

Types of models

# MODEL CONFIGURATION

## 1. Rules configuration

Set asset naming

## 2. Model Configuration

Create model

Assign to folders for use

## RULES CONFIGURATION



To `post_input.aspx`, add:

```
<% TDW.SetAssetLabel(  
    "page_title", context,  
    asset); %>
```

Edit test file and change header.

1. Note the name of the test file has changed in the file view

# MODELS IN CROWNPEAK

## Models

Accessed from the New menu

Implemented by developers or Admins, models are used for creation of most pages and sections


Models ensure that all configuration settings will be the same

- Template
- Workflow
- Access Properties

Can be used to create a single asset, a section, or an entire site

## Ideal for

End-users, templated content, simple or complex structures, creating brand-new content

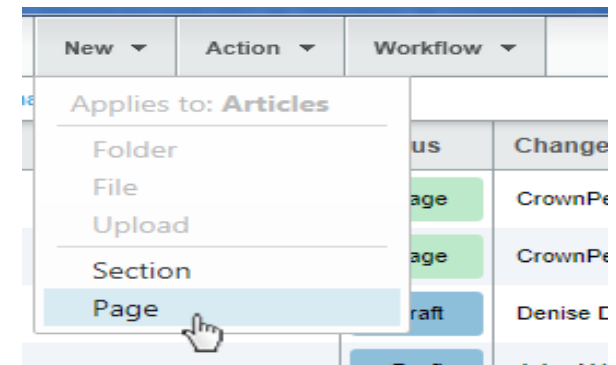

## CREATE MODEL



Navigate to /Introduction to CrownPeak/IntroProject/Modelsa and create a folder

(This is the container for your model)

Create a new file and select your template (for example: /Introduction to CrownPeak/IntroProject/DD Template)

Set Workflow to “Basic Workflow”

## ASSIGN MODEL



Go to your folder in /Introduction to CrownPeak/Introduction Site/US-EN

Select Properties > Models


Select the folder that contains the model you just created

Your model will populate the New menu

## Simple Model

Single asset or single folder: e.g., new Article or new Press Release Year



System > Models > Sandbox > Denise with Solutionary > Simple Model

Type	Label	Status	Changed By	Changed On	Size	Template	ID
	Simple Model	Draft	Denise Duncan	11/1/2012 9:26:56 AM	0 B	Detail Page	4723

## Intermediate Model

Model with a group of assets or folders

System > Models > Sandbox > Denise with Solutionary > Intermediate Model

Type	Label	Status	Changed By	Changed On	Size	Template	ID
	Intermediate Folder		Denise Duncan	11/1/2012 9:32:12 AM	1		4726
	Intermediate Model	Draft	Denise Duncan	11/1/2012 9:30:24 AM	0 B	Detail Page	4727






## Recursive Model

Folder that calls itself as a model – allows for deep hierarchy of content

E.g., a Subsection folder that can create new pages or new subsections inside of it to create nested subsections


System > Models > Sandbox > Denise with Solutionary > Recursive Model > Recursive Folder

Type	Label	Status	Changed By	Changed On	Size	Template	ID
	Index	Draft	Denise Duncan	11/1/2012 9:39:09 AM	0 B	Detail Page	4737

Open GoTo New Action Workflow

Sandbox > Denise v

Applies to: Recursive Example

Type	Label	By	Changed On	Size	Template	ID
	This is a folder	Duncan	11/1/2012 9:41:22 AM	2		4739

- Folder
- File
- Upload
- Recursive Folder
- Recursive Model

## Changing Models

Updating the model will not retroactively update content created by that model

As a result, try to get your Models configured properly the first time

## USING THE MODEL



Go to your folder in /Introduction to CrownPeak/Introduction Site/US-EN

Go to the New menu

Select the new option created by your model

A new page will be created


It will use the template,  
workflow and access  
assigned to the model

Type your question(s) in the question box.

# QUESTIONS

CONFIGURE  
MODULE 1  
CONFIGURE  
YOUR SITE

# SCHEDULE - TOMORROW

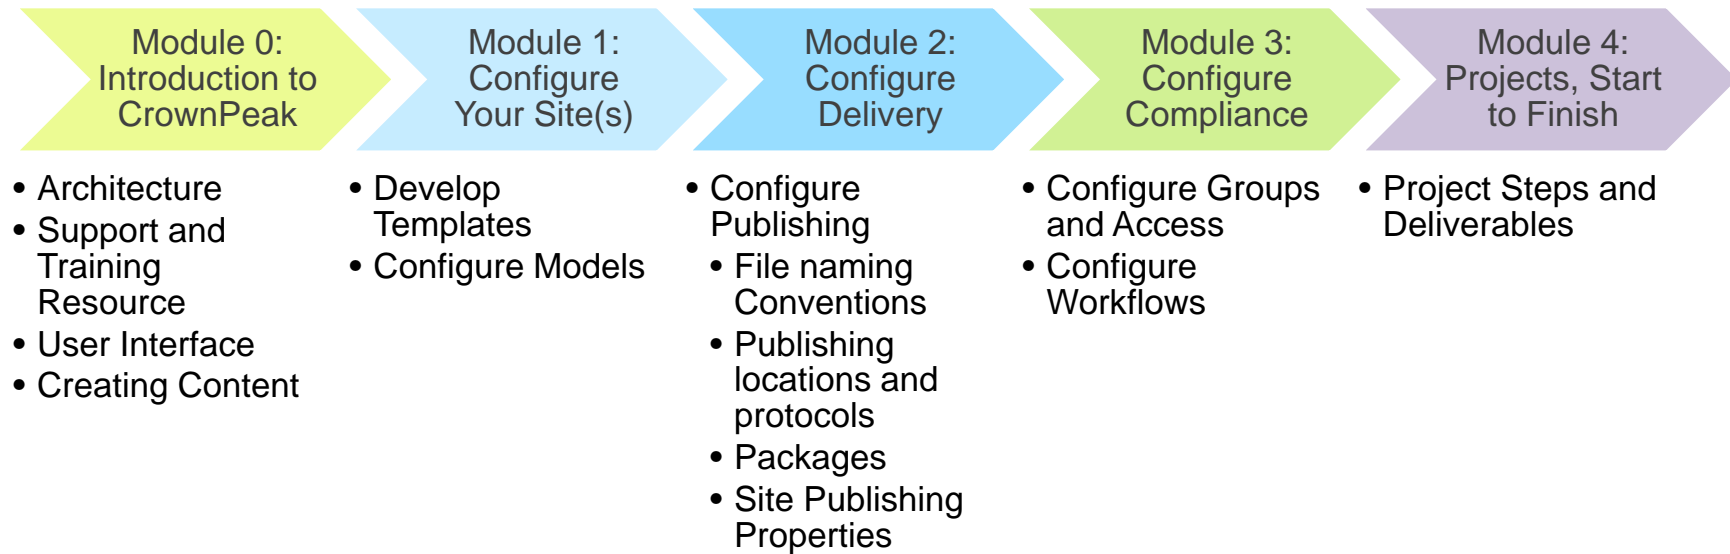

CONFIDENTIAL

